
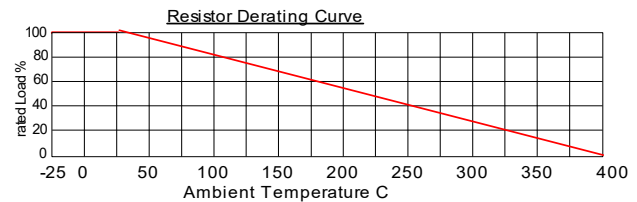


Silicon Coated Wire-Wound Power Resistors with mounting fixture

- These resistors are suitable as loading resistor, braking resistor, capacitor discharge, Resistive Load simulation, Machinery, Machinery and Equipment higher power application.
- Good for Continuous Load and Short Time Over Load application
- Mounting fixture is available
- Resistance Adjustable version is available : DSR-F series
- Resistance Box and Load Bank available with power up to 2000kW.
- Support Precision Resistance Tolerance requirement
- Support Vitreous Enamel coating for harsh environment applications.

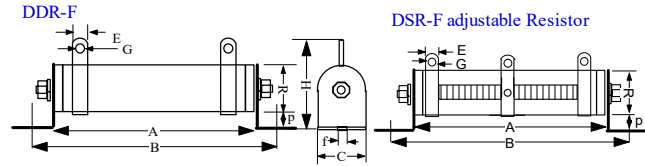

DDR-F / DSR-F Type – Wire Wound Resistors

Dimension in mm :	R	A	B	C	H	p	E	G	f
Tolerance : +/- mm	1	5	5	1	3	3	1	1	1
15W	15	45	66	15	40	13	6	3.5	4.5
20W	15	50	71	15	40	13	6	3.5	4.5
25W	20	50	80	20	50	15	6	3.5	5
30W	20	70	100	20	50	15	6	3.5	5
40W	20	87	115	20	50	15	6	3.5	5
50W	28	90	122	28	68	20	9	4.5	6
80W	28	90	122	28	68	20	9	4.5	6
100W	28	170	202	28	68	20	9	4.5	6
150W	28	215	247	28	68	20	9	4.5	6
200W	28	267	299	28	68	20	9	4.5	6
250W	28	267	299	28	68	20	9	4.5	6
300W	40	267	305	40	90	20	10	4.5	6
400W	40	330	367	40	90	20	10	4.5	6
500W	50	330	370	50	98	20	10	6	8
600W	50 / 60	330	370	50	98	20	10	6	8
700W	50	400	440	50	95	20	10	6	8
800W	70	300	331	70	135	30	15	8	8
1000W	70	300	331	70	135	30	15	8	8
1500W	70	415	446	70	135	30	15	8	8
2000W	70	510	541	70	135	30	15	8	8
2500W	70	600	631	70	135	30	15	8	8
3000W	70	600	631	70	135	30	15	8	8
4000W	100	430	468	100	185	35	15	8	8
5000W	100	500	538	100	185	35	15	8	8
6000W	100	600	638	100	185	35	15	8	8
10,000W	150	600	640	152	260	43	30	8	10
12,000W	150	660	700	152	260	43	30	8	10
15,000W	150	660 / 750	700 / 850	152	260	43	30	8	10
20,000W	150	1000	1040	152	260	43	30	8	10

DNR-F Type – Low Inductance Wire Wound Resistors

Dimension in mm :	R	A	B	C	H	p	E	G	f
Tolerance : +/- mm	1	5	5	1	3	3	1	1	1
15W	15	45	66	15	40	13	6	3.5	4.5
20W	15	50	71	15	40	13	6	3.5	4.5
25W	20	50	80	20	50	15	6	3.5	5
30W	20	70	100	20	50	15	6	3.5	5
40W	20	87	115	20	50	15	6	3.5	5
50W	28	90	122	28	68	20	9	4.5	6
80W	28	90	122	28	68	20	9	4.5	6
100W	28	170	202	28	68	20	9	4.5	6
150W	28	215	247	28	68	20	9	4.5	6
200W	28	267	299	28	68	20	9	4.5	6
250W	28	267	299	28	68	20	9	4.5	6
300W	40	267	305	40	90	20	10	4.5	6
400W	40	330	367	40	90	20	10	4.5	6
500W	50	330	370	50	98	20	10	6	8
600W	50 / 60	330	370	50	98	20	10	6	8
700W	50	400	440	50	95	20	10	6	8
800W	70	300	331	70	135	30	15	8	8
1000W	70	300	331	70	135	30	15	8	8
1500W	70	415	446	70	135	30	15	8	8
2000W	70	510	541	70	135	30	15	8	8
2500W	70	600	631	70	135	30	15	8	8
3000W	70	600	631	70	135	30	15	8	8
4000W	100	430	468	100	185	35	15	8	8
5000W	100	500	538	100	185	35	15	8	8
6000W	100	600	638	100	185	35	15	8	8
10,000W	150	600	640	152	260	43	30	8	10
12,000W	150	660	700	152	260	43	30	8	10
15,000W	150	660 / 750	700 850	152	260	43	30	8	10
20,000W	150	1000	1040	152	260	43	30	8	10

Electrical Characteristics :

Testings	Testing Conditions	Testing Results
Resistance Tolerance	JIS-C-5202 5-1 testing voltage<3V 25C	Standard +/-5%
Temperature Coefficient	JIS-C-5202 5-2	+/- 200 - 400ppm/C max.
Rated Load	JIS-C-5202 5-4 40C at rated voltage 1hour	$\Delta R \leq \pm(1\% + 0.1\text{ohm})$ surface temperature $\leq 400\text{C}$
Insulation Resistance	JIS-C-5202 5-6 500Vdc	100M ohm min.
Dielectric Withstand voltage	JIS-C-5202 5-7 1000Vdc 1min. between Terminal and body	$\Delta R \leq \pm(0.1\% + 0.05\text{ohm})$
Short Time Overload	JIS-C-5202 5-5 DDR/DSR/DNR : 5*rated power in 5 sec DDVR : 50*rated power in 10 sec	$\Delta R \leq \pm(2\%R_o + 0.1\text{ohm})$
Flammability	1 - 6 times rated power 5min.	without combustion
Load Life	JIS-C-5202 7-10 90min.-ON 30min.-OFF 500hours	Free of appearance or structural irregularity, Surface coating crack $\Delta R/R \leq \pm(5\% + 0.1\text{ohm})$

Part Number :

Series + Rated Power + Resistance Value (ohm) + Resistance Tolerance + Drawing Number + Multi-Terminals (DDR & DNR)

DDR	15 – 20,000W	0.1 ohm = R1	B= +/-0.1%	F : mounting fixture	2 Terminals : NA
DSR	15 – 20,000W	1 ohm = 1R	D= +/-0.5%	W : with handwheel	3 Terminals : 3MT
DNR		15 ohm = 15R	F = +/-1%		4 Terminals : 4MT
		150 ohm = 150R	G = +/-2%		
		1k ohm = 1kR	H= +/-3%		
			J = +/-5%		
			K= +/-10%		
			M= +/-20%		
			R= -0/+5%		
			T= -0/+10%		